

## Used parts

(Note: Some parts may be different than images)

1. Headrest



2. Backrest



3. Seat+mechanism+armrests



4. Base



5. Gaslift



6. Casters



7. Screws

## Model TAU

A	M8x40	3 pcs	Backrest
	1 pcs	IMBUS	



## Assembly instructions – model TAU

[www.emagra.cz/cs/m-391-kancelarska-zidle-tau](http://www.emagra.cz/cs/m-391-kancelarska-zidle-tau)

### STEP 1

1. Take the seat out of the box
2. Take the backrest out of the box
3. Remove headrest, gaslift, base, casters, screws (1,4,5,6,7)



### STEP 2

1. Fasten backrest to the mechanism
2. Tighten the screws A- 3 pcs to a metal plate which attaches to the lower part of the backrest



### STEP 3

1. Insert 5pcs of casters into the base, then insert gaslift into the opening in the base
2. Insert the gaslift into the corresponding hole in the mechanism



### STEP 4

1. Fasten headrest to the backrest



a) Put on b) Click in



c) Slide down d) Finished



### User guide

#### Maintenance and attention

1. The chair can only be used by one person at a time.
2. Do not use the chair as a stool or ladder.
3. Do not use the chair unless all parts are properly assembled.
4. Do not use the chair until all screws are properly tightened.
5. If the chair is damaged by external influences, do not use it without expert repair.
6. For professional service, please contact us by phone +420 463 034 155, or by mail [export1@emagra.cz](mailto:export1@emagra.cz)



## Using instructions - model TAU

### Standard mechanism A




Locking button of backrest position through synchro mechanism. The stiffness of the backrest automatically sets according to the weight of the user.

Height-adjustable backrest system UP-DOWN

Lever for height adjustment of the chair  
Push the lever towards the seat to activate the gaslift.



Button for depth seat adjustment - to move the seat forwards / backwards. The button is part of the seat.

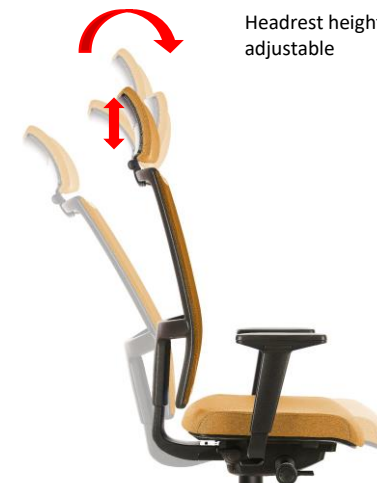

Headrest height and angle adjustable

### Optional mechanism D




Lever for easy width adjustment of the armrests

Button for height adjustment of armrests

The gray wheel is used to lock back position (on / off)

The black (front) screw is used for manual regulation of the mechanics stiffness according to the user's weight (+/-)

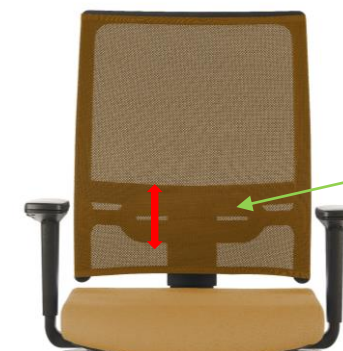

Standard independently height-adjustable lumbar spine support