

Assembly instructions – model B3L seat with depth regulation

Used parts

(Note: Some parts may be different than images)

1. Gaslift



2. Casters



3. Armrests



4. Synchro mechanism



5. Seat



6. Base



7. Backrest



8. Headrest



9. Screws


Model B3L / armrests K1, Z1

A	M6x40	6pcs	Armrests
B	M6x20	4pcs	Mechanism
C	M8x12	4pcs	Backrest
D	M6x25	4pcs	Headrest
		1 pcs	IMBUS



STEP 1

1. Fasten the cube for width adjustability of armrests to the seat and fasten the screws A x 6 pcs
2. Insert the armrests
3. Attach the locking lever of the armrests

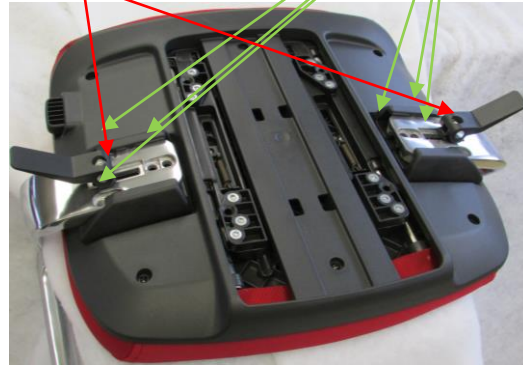

STEP 2

1. Fasten mechanism to the seat
2. Tighten the screws C x 4 pcs



STEP 3

1. Fasten backrest to the mechanism
2. Tighten the screws C x 4 pcs



GUARANTY

STEP 4

1. Insert 5 pcs of casters into the base, then insert gaslift into the opening in the base
2. Insert the gaslift into the corresponding hole in the mechanism



STEP 5

1. Fasten headrest to the backrest
2. Tighten the screws D x 4 pcs



User guide

Maintenance and attention

1. The chair can only be used by one person at a time.
2. Do not use the chair as a stool or ladder.
3. Do not use the chair unless all parts are properly assembled.
4. Do not use the chair unless all screws are properly tightened.
5. If the chair is damaged by external influences, do not use it without expert repair.
6. This is a mechanical product subjects to user stress, it is necessary to check the chair regularly and possibly tighten the screws.

For professional servis, please contact us by phone +420 463 034 155 or by mail export1@emagra.cz



Using instructions – model B3L seat with depth regulation



Handle for height regulation of **W mechanism**



Fixed headrest from injected foam



Handle for easy adjustability width of armrests



Button for locking synchronous **mechanism A** with automatic pressure control according to user weight

Button for seat depth control



Design **K1 armrests** from polished alluminium
Options of regulation:
width adjustable



3D adjustable **Z1 armrests** with soft polyurethane foam on touch parts
Options of regulation:
width adjustable
backward/forward